

SHIMADEN THREE-PHASE POWER REGULATOR

SERIES PAC36P 20~600A

- Wide application with variety of functions
- Suitable for air conditioning, electric, furnace, dryer, bio engineering, food industry, chemical industry, plastic formation and control of heat source applications.



20A

30A, 45A

60A, 90A

135A, 180A

450A, 600A

240A, 300A

FUNCTION

Standard Function

Electronic over current protect function:

Protects thyristor element by shutting off the over current detected by a load current monitoring CT.

Constant voltage characteristics by means of voltage feedback:

Stable output provided by the voltage control function and easy operation achieved by the linear characteristics of control input and output voltage.

Soft start function:

Setting suitable soft start time for the load.

Additional Function (option)

Automatic power adjusting function:

Stable output provided by the voltage control function and easy operation achieved. The suitable power for the control temperature is continuously controlled by a signal from the programmable controller, computer and adjuster. Applicable for soft control of the low range.

Constant-current control (Current feedback):

Applicable to controlling the pure metallic heater and the Kanthal Super heater.

Constant-power control (Power feedback):

Applicable to controlling the SiC and the carbon heater, and applicable to high stability controlling.

Power linear control (Voltage square feedback):

Applicable to precise controlling for Nichrome heater load with power linear characteristics of the control input / output voltage.

Current limiting function:

Applicable to loads with rush current on starting and continuous usage over current condition such as pure metallic, Tungsten and Molybdenum heaters.

Start up output limiting function:

Applicable to the rush current reduction and load protection on turning on the power supply.

Heater break alarm:

Alarm display and output in case of detecting the low power condition of the broken heater and heater defect.

Rapid fuse:

Perfect protection for the thyristor device and the power line from the over current of the short circuit and the grounding.

Power adjustment function:

Addition of various manual equipment used for adjusting ramp, base (residual output), manual and high / low.

Monitor and Alarm Output on the Trouble Situation

Over-current protection:

[O.C] monitor lights and alarm output on

Fan stop (for models over 180A):

[FAN] monitor lights and alarm output on

Rapid fuse burnt out:

[FUSE] monitor lights and alarm output on

Heater break alarm:

[H / B] monitor lights and warning output on

SPECIFICATION

Control input and Rating

Current input: 4~20mA / DC, Receiving impedance: 100Ω
 Voltage input: 1~5V / DC, Input impedance: 200kΩ min.
 0~10V / DC, Input impedance: 200kΩ min.
 Contact signal: Non-volatage contact signal
 Note: Select external power (P) or (H) in the table of code Selection Item 7, (Output Adjusting Function)

Power Supply and Rating

200V type: 200~220V AC ± 10% 50 / 60Hz
 220~240V AC ± 10% 50 / 60Hz
 400V type: 380~400V AC ± 10% 50 / 60Hz
 400~440V AC ± 10% 50 / 60Hz

Control Mode:

Soft start: Phase angle control system
 Adjustable approx. 1~10 sec. (time for reaching 90%)
 Applicable load: Resistive load, inductive load (transformer primary side control)

Output voltage control range: 0~98% minimum of input voltage
 Output stability (95% or less of output voltage): Input fluctuation ± 2% or less when input fluctuation is ± 10%.

Control element configuration: Mixed antiparallel configuration of SCRs and diodes

Over-current Protection System

Electronic type (gate signal breaking system) standard: approx. 130% of rated current
 Rapid fuse type (optional): 130~150% of rated current
 Reset
 Electronic type: Turn power OFF and reapply
 Rapid fuse: Replace fuse.

Current Capacity and Cooling System

20A,30A,45A,60A,90A,135A: Self-cooling system
 180A,240A,300A,450A,600A: Forced air cooling system

Alarm Monitors and Rating

Over-current: [O.C] monitor lights. / AL1-AL2 conducting
 Fan stop: [FAN] monitor lights. / AL1-AL2 conducting
 Fuse burnt out: [FUSE] monitor lights./AL1-AL2 conducting
 Heater break: [H / B] monitor lights. / HB1-HB2 conducting
 Output contact rating: 240V AC 1A / Resistive load

Power Lamp

Correct Phase sequence: Green LED lights.
 Open / opposite phase: Red LED lights.
 sequence:

Operating Environment

Ambient temperature range: -10~50°C
 Ambient humidity: 90% RH max. with no condensation

Insulation Resistance

Power terminal and chassis: 500V DC 20MΩ min.
 Input terminal and power terminal: 500V DC 20MΩ min.

Dielectric Strength

Power terminals and chassis:
 200~240V power supply: 2000V AC 1 minute
 380~440V power supply: 2500V AC 1 minute

Material / Finish:

Ordinary steel plate / paint coating (equivalent to N8.5 Munsell number)

External Dimensions and Weight:

See external demension drawings.

Terminal Cover:

Installed as standard equipment.

Additional functions (option)

Power adjuster
 Connection to voltage / current output type controller

Internal Power (standard): 0~100%
 External Power: 0~100%
 Manual Power: 0~100%
 Base Power: 0~100%

External power + Manual power: 0~100%
 External power + Base power: 0~100%

Connection to contact output type controller

External Power: 0~100%
 High-low power: 0~100%

Constant-current control (current feedback)
 Applicable loads: Pure metallic heaters, super Kathal, etc.

Constant-power control (power feedback)
 Applicable loads: SiC, carbon heaters

Power linear control (voltage feedback)
 Applicable loads: Nichrome heater

Output limiting function:
 Current limit: 50~100% of rated current
 Start up output limiting: 0~60% output for 1~60sec.

Rapid fuse: With alarm output function
 Heater break alarm: Setting at 0~100% of rated current
 Automatic power adjusting function: 50~100%

INTERNAL HEAT GENERATED

Internal heat generated by series PAC36P at maximum current operation is as follows.The heat decreases is proportional to the current decrease. Ventilation should be considered for the system.

Rating current (A)	20	30	45	60	90	135	180	240	300	450	600
Internal heat generated (W)	82	121	151	196	274	442	620	731	1040	1567	2000

Approx. 10% more heat is generated in case of using rapid fuse.

SHIMADEN THREE-PHASE POWER REGULATOR

ORDERING INFORMATION


ITEMS		CODE		SPECIFICATIONS	
SERIES	PAC36P			Phase Angle Control 3-Phase Power Regulator	
CONTROL INPUT		3		1~5V DC, Input Impedance: 200k Ω / contact signal	
		4		4~20mA DC, Receiving Impedance: 100 Ω / contact signal	
		6		0~10V DC, Input Impedance: 200k Ω / contact signal	
		9		Others (Please consult before ordering.)	
POWER SUPPLY		15-		200~220V	
		16-		220~240V	
		17-		380~400V	
		18-		400~440V	
CURRENT CAPACITY			200~240V	380~440V	
		CODE		CODE	
		021	20A	022	20A
		031	30A	032	30A
		041	45A	042	45A
		061	60A	062	60A
		091	90A	092	90A
		131	135A	132	135A
		181	180A	182	180A
		241	240A	242	240A
		301	300A	302	300A
		451	450A	452	450A
		601	600A	602	600A
	FEEDBACK FUNCTION		0		Constant voltage (standard feature)
		1		Constant current	
		2		Constant power	
		3		Voltage Square-root	
OUTPUT CONTROL FUNCTIONS		0		None	
		1		Startup time output control limiting (0~60%, 1~60sec.)	
		2		Current limiting	
		3		Startup time output control + Current limiting	
EXTERNAL POWER ADJUSTER	WHEN USED WITH VOLTAGE AND CURRENT OUTPUT CONTROLLER	N		None (Internal installation as standard)	
		P		External power adjuster	
		M		Manual power adjuster	
		B		Base power adjuster	
		W		External power + Manual power	
	Y		External power + Base power		
	WHEN USED WITH CONTACT OUTPUT	P		External power adjuster	
		H		High-Low power adjuster	
HEATER BREAK ALARM		0		Without	
		1		With (0~100% setting of rated current)	
RAPID FUSE		0		Without	
		1		With (See rapid fuse table.)	
AUTO POWER ADJUSTMENT FUNCTIONS		0		Without	
		4		4~20mA DC, Receiving Impedance: 100 Ω	
		6		0~10V DC, Input Impedance: 200k Ω	
REMARKS		0		Without	
		9		With (Please consult before ordering.)	

• Rapid Fuse Option


CURRENT CAPACITY	FUSE CAPACITY	PARTS NO.
20A	30A	CR6L- 30S
30A	40A	50SHA 40S
45A	60A	50SHA 60S
60A	100A	50SHB 100S
90A	120A	50SHB 120S
135A	200A	CS5F 200
180A	250A	CS5F 250
240A	350A	CS5F 350
300A	450A	CS5F 450
450A	600A	CS5F 600
600A	800A	CS5F 800

DRAWING OF ADDITIONAL FUNCTION CHARACTERISTIC


• Automatic Power Adjusting Function

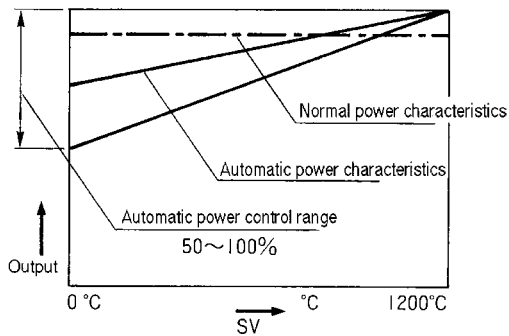


• Constant Current Characteristics (Current Feedback)

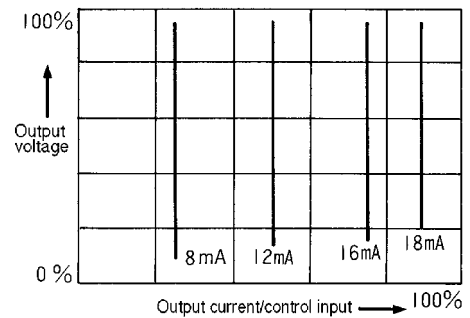


• Power Linear Characteristics (Voltage Feedback)

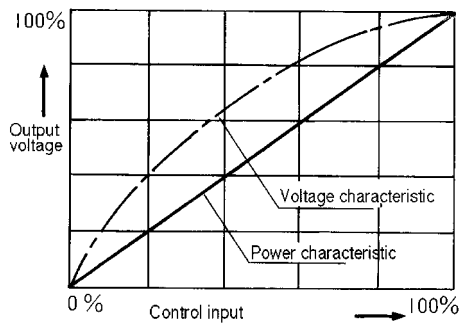


• Constant Power Characteristics (Power Feedback)

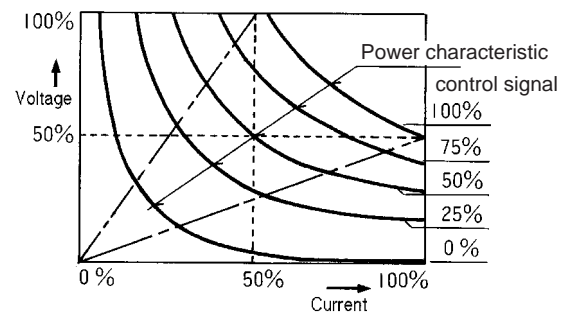

• Current Limiting Characteristics

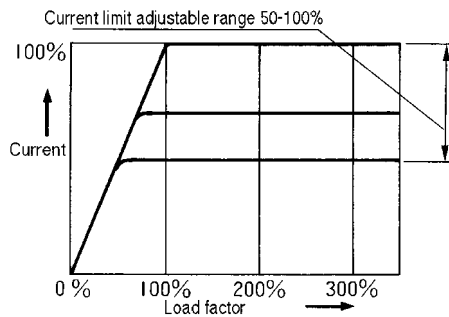


• Start up Output Limiting Characteristics

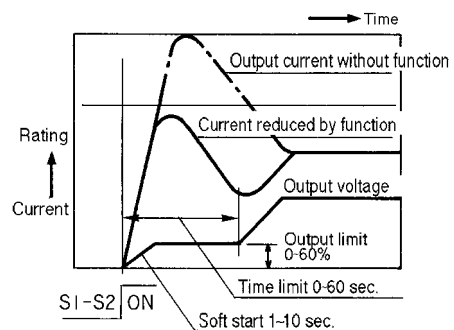


SHIMADEN THREE-PHASE POWER REGULATOR


• Output Power

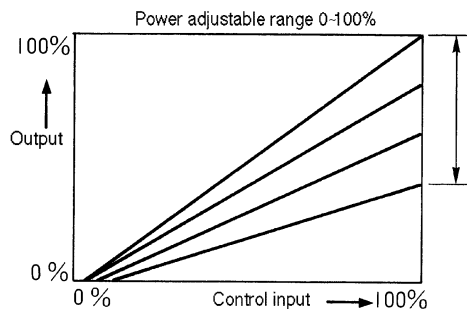


• Base (Residual) Power Characteristics

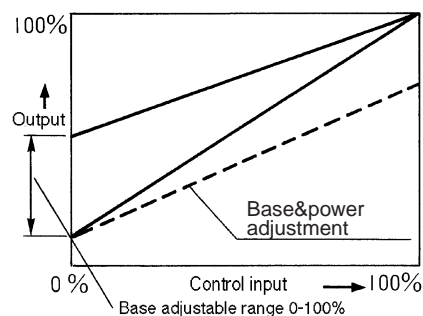

• High / Low Power Characteristics

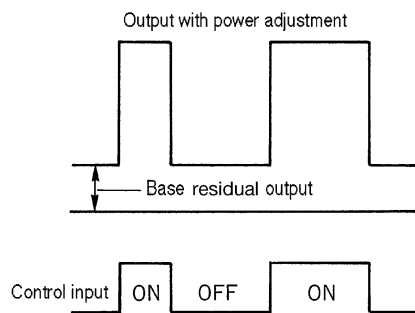

• Heater Break Alarm Circuit

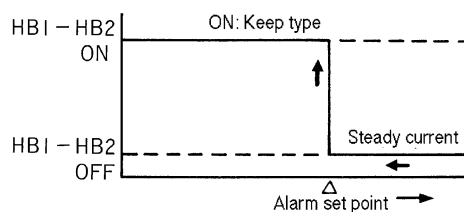

HEATER CHARACTERISTICS



Heater elements are characterized as listed in the following table. Start up time output control limiting circuit is necessarily used for infrared lamp load. Addition of current limiting function is required for the loads with large heat capacity such as Platinum, Molybdenum, Tungsten and Kanthal Super.

	Group	Load Type	Maximum Temperature	Resistance-Temperature characteristics	Additional Function
Rated Resistance Heater	Alloy	Nichrome Iron • Chrome Graphite Kanthal A	1100°C (in air) 1200°C (in air) 1330°C (in air)		<ul style="list-style-type: none"> General characteristics. Covered by standard specification.
Variable Resistance Heater	Pure Metallic	Tungsten Molybdenum Platinum Kanthal Super	2400°C (in vacuum) 1800°C (in vacuum) 1400°C (in vacuum) 1700°C (in air)		<ul style="list-style-type: none"> Infrared lamp (Tungsten): Start up time output control limiting circuit. Rush current should be reduced to the rating range by current limiting function.
	Carbonized Silicon	Techorandom Silliconit Elema	1600°C (in air) 1600°C (in air) 1600°C (in air)		<ul style="list-style-type: none"> Covered by standard specification by selecting twice current capacity. Covered by load capacity by adding current limiting function. (Care has to be taken in the configuration without transformer.) Adjust voltage to the terminal voltage of the load by using transformer.



EXAMPLE OF THE AUTOMATIC POWER FUNCTION

The automatic power function is a power adjusting function that provides suitable control output to the thyristor by external equipment (programmable controller, computer or controller) and improves controlling ability continuously providing suitable power to the SV(Set Value)


• Contstant Value Control

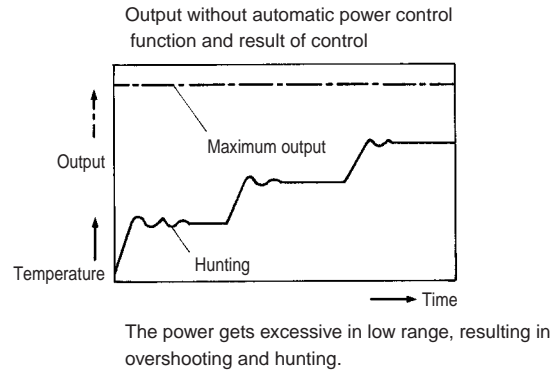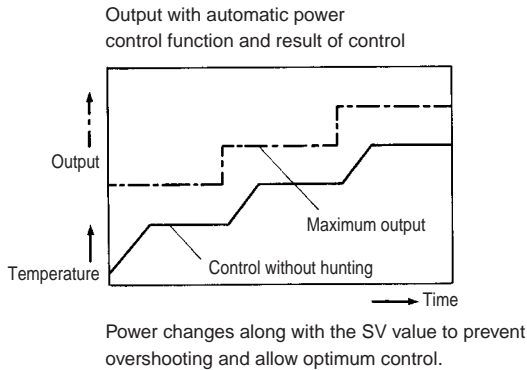

• Program Control

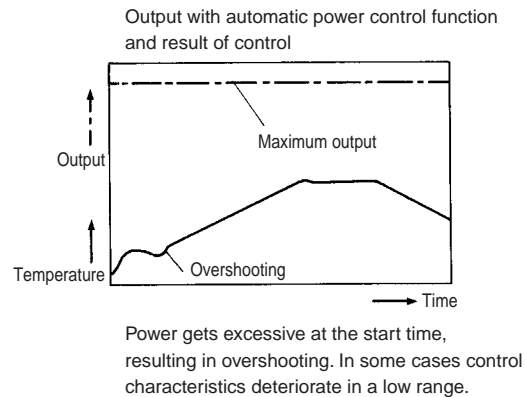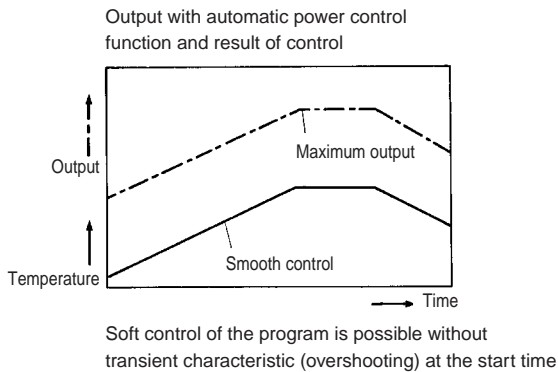

• Procedure for Automatic Power Adjusting Function

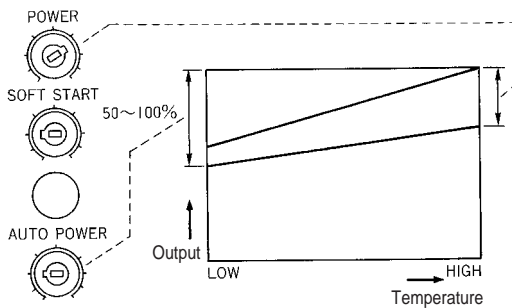


By setting output optimum to the low range set value on the [AUTO-POWER] adjuster, the output characteristic is designated to the line connecting automatic power adjusting value and the output at the maximum temperature. In case of adjusting maximum output, adjusters for internal power and external power are employed.

• Soft Control by Automatic Power Adjusting Function

In case of achieving small temperature stress such as bio industry and fine ceramic manufacturing, the automatic power adjustment is effective for precision control. The temperature control range expands for the same PID value in the PID control condition.

• Combination with Type SR253 or SR25 Adjuster

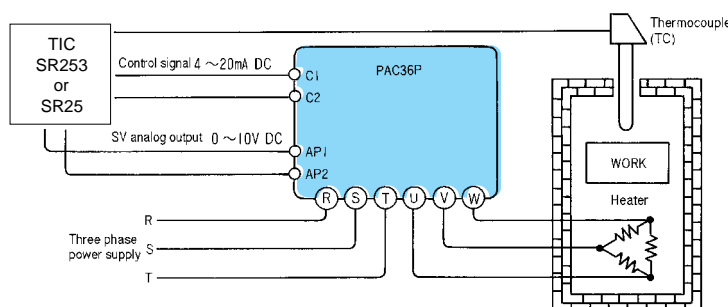


When the SV analog output (4~20mA or 0~10V) of the SR253 (SR25) controller is input to the auto power terminals (AP1 and AP2) of the PAC36, maximum power cramping, is set automatically by controller setting (SV) and the efficiency of control is improved. The combination plays another role; it effectively saves a total load when several thyristors are turned on simultaneously. AP1-AP2.

SHIMADEN THREE-PHASE POWER REGULATOR

PANEL INFORMATION AND CONTROL TERMINALS

Code	Terminal code
Terminal No.	
1	C 1 (+)
3	C 2 (-)
5	R 1
7	R 2
9	R 3
11	—
13	M
15	AL 1
17	AL 2
19	AL 3
2	S 1
4	S 2
6	CL 1
8	CL 2
10	CL 3
12	AP 1
14	AP 2
16	HB 1
18	HB 2
20	G

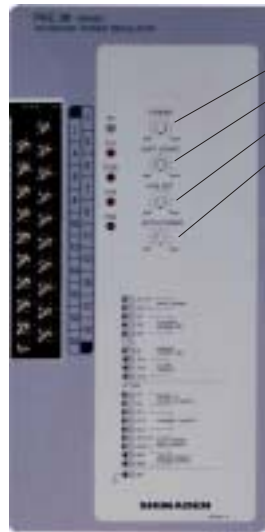

• Adjusters

- Internal power adjuster (standard)
- Soft start time adjuster (standard)
- Heater break alarm setting device (option)
- Automatic power adjuster (option)

• Monitor Lamps


- P.L.: Power supply
 - : Green LED turns on at correct phase sequence.
 - : Red LED turns on at open / opposite phase sequence.
- O.C.: Over-current
- Fuse: Burning-out of rapid fuse (option)
- H / B: Heater break alarm (option)
- FAN: Stoppage of cooling fan (standard for 180A or above)

• Terminal Codes and Functions

- C1-C2: Control input
- R1-R2-R3: External power (option)
- M: Manual / base adjustment (option)
- AL1-AL2-AL3: Alarm output common to over-current, FAN and FUSE
- S1 - S2: External sequence signal for start up time output control limiting
- CL1-CL2-CL3: Current limiting adjuster
- AP1-AP2: Automatic Power signal input
- HB1-HB2: Heater break alarm output


CIRCUIT BLOCK AND WIRING OF CONTROL TERMINAL

• Circuit Block

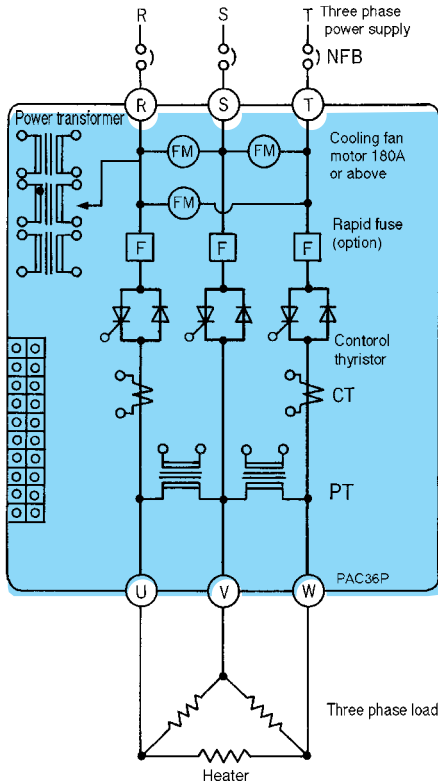

• Additional Function (Option) (Lower Terminal Terminal)

Additional function terminals are all optional items. No addition can be made after delivery. Select the option on ordering.

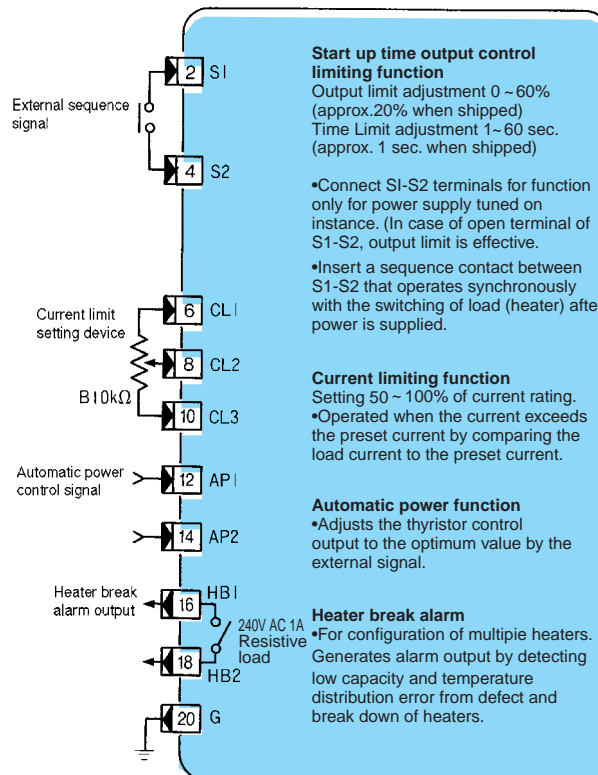


• **Output Adjusting Function (Upper Terminal)**

This function is available by connecting adjuster (rating B 10kΩ 1W), after delivery.


Wiring with contact output controller

External power



- To adjust output of contact ON (Controller output contact C-L conducted).
- Conduct ON: 0~100%


High / Low power

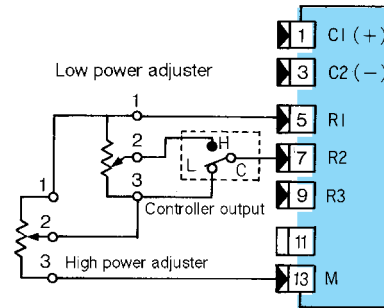

- To adjust maximum output for conducted (on) output contact C-L and to maintain non-conduct (off) (C-H conducted) output.
- High power: With C-L on 0~100%
- Low power: With C-H on High power x Low power


Wiring with voltage / current output controller

External power




- Internal power adjuster as standard
- Short circuit R2 and R3 when power adjuster is not used. (Adjust by internal power adjuster).
- Input of 100%: 0~100%

Manual power




- To adjust power manually

Base (residual) power




- To keep output steady when the control signal is at 0%.
- The maximum power is adjusted by internal power adjuster.
- Input of 0%: 0~100%

External power + Manual power (auto / manual)

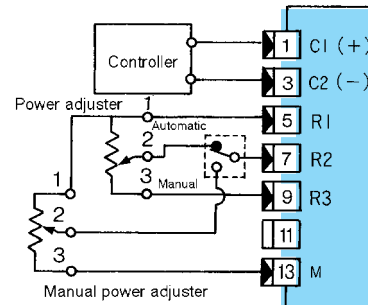


- External contact switches automatic / manual for power adjusting selection of automatic and manual operations.
- Please prepare the automatic / manual switch.

External power + Base (residual) power

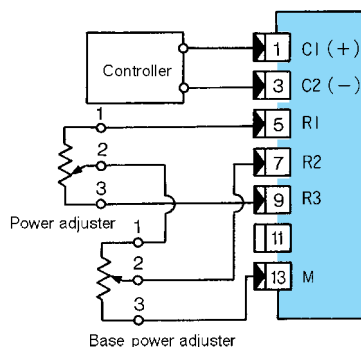

- To adjust maximum output and to maintain some parts of output of 0% control signal.

Alarm circuit




- Alarm output. Conduct between AL1 and AL2. Non conduct between AL1 and AL3.
- Operation Over-current protection circuit on operation. Fuse burnt out. Cooling fan stopped.

SHIMADEN THREE-PHASE POWER REGULATOR


EXTERNAL DIMENSION, WEIGHT, MOUNTING

20A

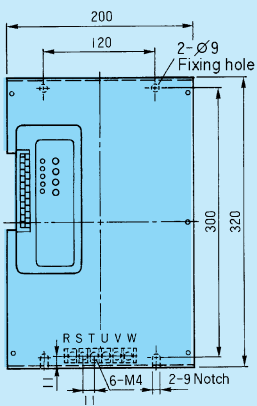


Weight: approx. 9kg.

30A • 45A

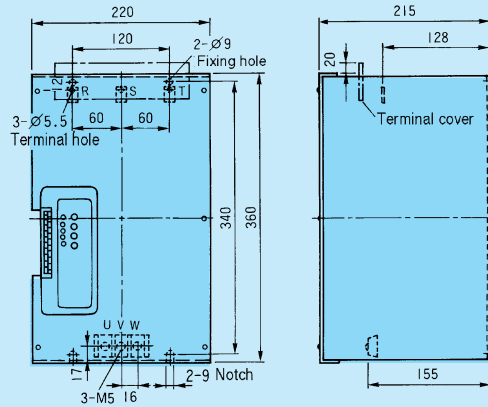


Weight: approx. 12kg.

60A • 90A

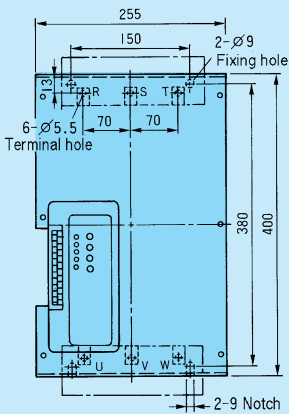


Weight: approx. 16.5kg.

135A • 180A • 240A • 300A

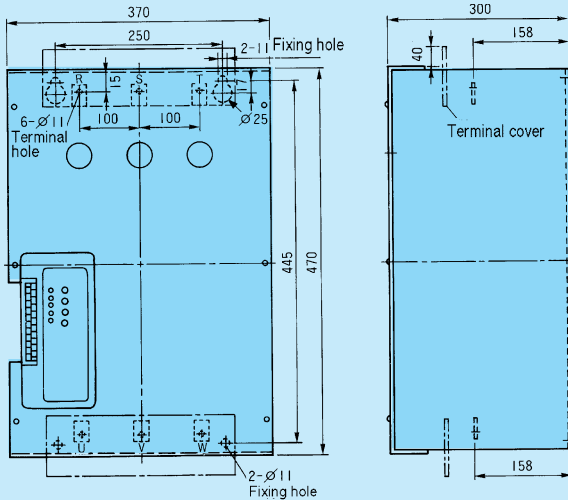


Weight: approx. 36kg.

450A • 600A

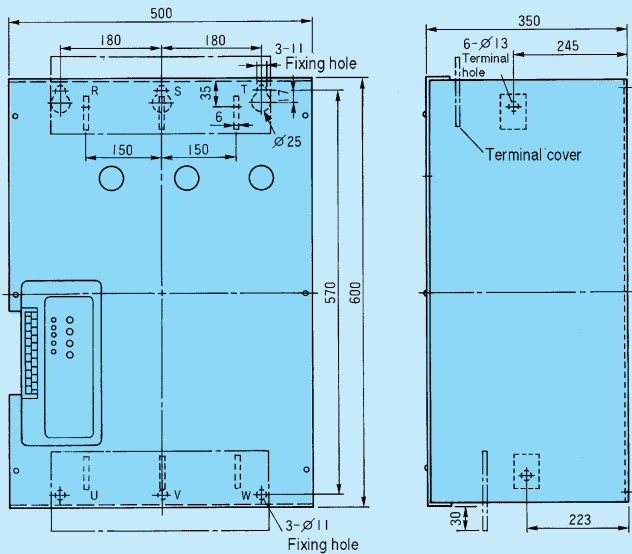

Weight: approx. 55kg.


Mounting diagram

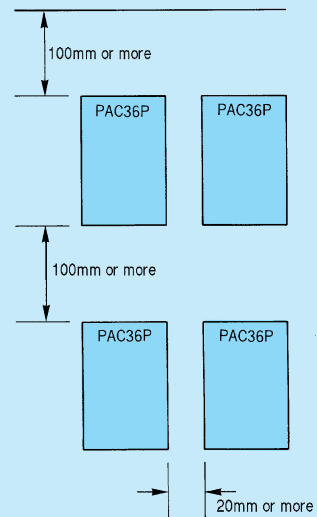


Unit : mm

APPLICATION EXAMPLES

•Application Connecting a Conventional Heater

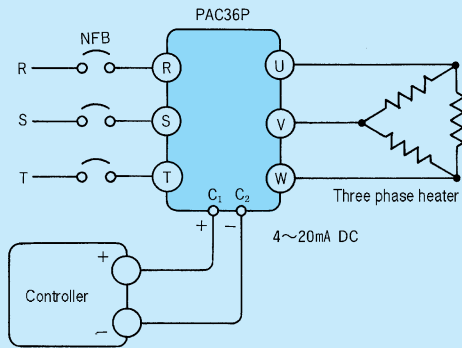

•Application with Transformer

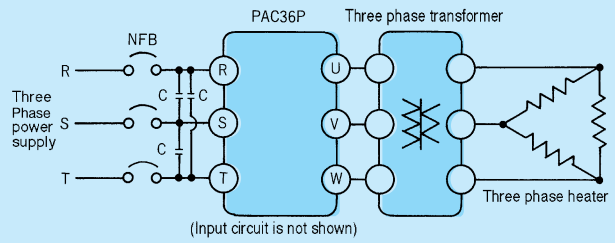

•Noise absorbing capacitor
C Oil capacitor
0.1~0.5 F / 1500V

The aim of transformer
•Isolates primary / secondary circuits.
•Adjust to the terminal voltage of the load.

- Note for transformer design -

Generally, margin is set for magnetic flux density in application of switching controlling. The value of the magnetic flux density should be less than 8000 Gauss. Avoid unbalance of load and rush current from magnetic saturation.

EXTERNAL POWER ADJUSTER

•Rating

Type: RV30YN20S

Characteristics / Resistance: B 10kΩ 1W




•External dimension and mounting

Lead: Vinyl lead wire 1 meter


Panel / Knob: 1 ea

Names and scale

- External power / 0~100%
- Manual power / the same as above
- Base power / the same as above
- High / Low power / the same as above
- Current Limiter / 50~100%



Panel Cutout



Unit: mm

⚠ Warning

- This product is designed for controlling the power of a heater or similar equipment used in a general industrial facilities. (It is not to be used for any purpose which regulates the prevention of serious effects on human life or safety.)

⚠ Caution

- If the possibility of loss or damage to your system or property as a result of failure of any part of the process exists, proper safety measures must be made before the instrument is put into use so as to prevent the occurrence of trouble.



ISO 9001



ISO14001

(The contents of this brochure are subject to change without notice.)

Temperature and Humidity Control Specialists

SHIMADEN CO., LTD.

Head Office: 2-30-10 Kitamachi, Nerima-Ku, Tokyo 179-0081 Japan
Phone: +81-3-3931-7891 Fax: +81-3-3931-3089
E-MAIL: exp-dept@shimaden.co.jp URL: <http://www.shimaden.co.jp>